



PK 74002 Performance

E PJ170E JV1 DPS

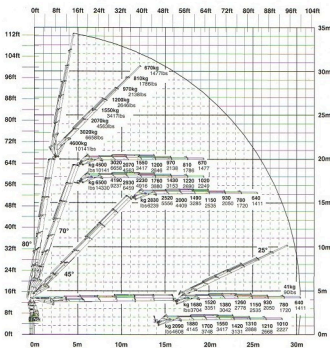


G

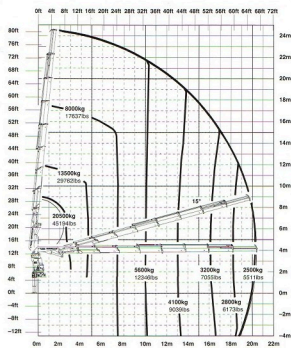

PK 74002 Performance		
Technical Specifications (EN 12999 H1-B3)		
Max. lifting moment	70.1mt/688.0 kNm	507440 ft.lbs
Max. lifting capacity	23000 kg/225.6 kN	50710 lbs
Max. hydraulic outreach	20.4 m	66' 11"
Max. outreach	25.1 m	82' 4"
Max. outreach (with fly-jib)	32.6 m	106' 11"
Slewing angle	endless	
Slewing torque		
with 1 gear	4.5mt/44.1 kNm	32530 ft.lbs
with 2 gears	7.0mt/68.7 kNm	50670 ft.lbs

PK 74002 A Performance	
Standard crane	
Outreach	7.6 m 24' 11"
Stabilizer spread standard	8.6 m 28' 3"
Fitting space required	min. 1.51 m/4' 11" max. 1.66 m/5' 5"
Width folded	2.55 m 8' 4"
Max. operating pressure	350 bar 5075 psi
Recommended pump capacity	from 80 l/min 17.6 imp.gal/min 21.1 US gal/min
RC, LC-system	to 100 l/min 22.0 imp.gal/min 26.4 US gal/min
Dead weight standard crane	5755 kg 12690 lbs

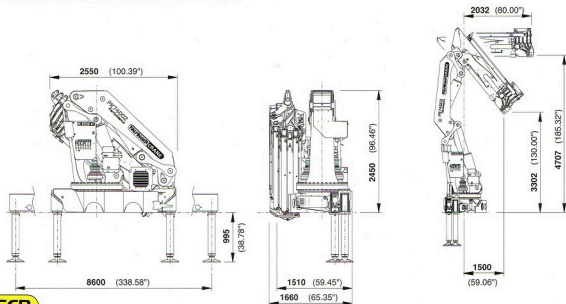

Design and specification are subject to change without prior notice.

www.palfinger.com

KP-PK74002L1-E, 04/07